



All the patents are held accountable counterfeiting.

Features



Green Power

- Full Range Input with PFC
- Comply with High Efficiency Power 80Plus Criterion
- 92% High Efficiency
- Split rail & Series connection possible
- Fan cooling
- 100% burn-in test
- EN 62368 approved
- 2 years warranty
- Output modify range: 3V~500VDC

DIMENSIONS: 131(L)*119.2(W)*63.7(H)mm

WEIGHTS: 950g

General specifications

INPUT

Input range	90~264VAC 120~380VDC
Input frequency	47~63Hz
Inrush current (25°C)	20A/110VAC 40A/220VAC
Power factor	95% Min.

OUTPUT

Hold-up time	16ms
Short protection	Re-power on to recover
Over load protection	Short-circuit protection
Optional 5V/3A AUX output for models which output voltage lower than 40VDC	

Detail specifications

960 Watts (See note session for more details.)

MODEL	O/P Volt Adj. ± %	Load(Current) ¹			Ripple & Noise ⁴	Line REG. ²	Load REG. ³	Efficiency ⁵	O.V.P
		Min.	Rated	Max.					
LPF1960-24C	V : +24V ±10%	0A	40A	40A	240mV	±1%	±1%	91% Ref.	31.4 ~ 34.7V
LPF1960-36C	V : +36V ±10%	0A	26.6A	26.6A	360mV	±1%	±1%	92% Ref.	47.8 ~ 53.2V
LPF1960-48C	V : +48V ±10%	0A	20A	20A	480mV	±1%	±1%	92% Ref.	64.6 ~ 71.4V
LPF1960-100C	V : +100V ±10%	0A	9.6A	9.6A	1000mV	±1%	±1%	92% Ref.	140 ~ 165V
LPF1960-250C	V : +250V ±10%	0A	3.84A	3.84A	2500mV	±1%	±1%	92% Ref.	310 ~ 360V

CE Standards

EN 55032, EN 55024,
EN 61000-3-2, EN 61000-3-3,
(EN 61000-4-2, EN 61000-4-3,
EN 61000-4-4, EN 61000-4-5,
EN 61000-4-6, EN 61000-4-8,
EN 61000-4-11)
Heavy Industry level, criteria A
LVD: EN 62368-1:2014

Safety Standards



UL 508 Meet




CE Marking

Environments

Operating Temperature -10 ~ 60°C, Ambient
Operating Humidity 20 ~ 90% RH, No Condensing
Storage Temperature -20 ~ 85°C, Ambient
Vibration 2G, 10~500Hz, 3 axes

NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 220VAC input.
6. Hold-up time is measured at rated load and 220VAC input.
7. Output Voltage Adjustable is measured on 5% of rated load.
8. Reign Power reserve the right to change specifications at any time without notice.

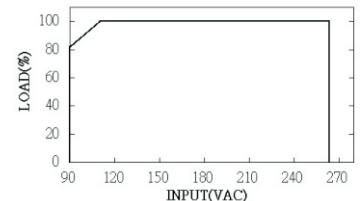

Derating curve