

#### **Features**

# **C** € IP67

# **General specifications**

#### **INPUT**

Input range

170~250VAC

Input frequency Inrush current (25° C)

50~60Hz 40A/220VAC

DIMENSIONS: 202(L) x 35(W) x 24(H)mm WEIGHTS: 280g

- Waterproof, meet class IP67
- **Convection cooled**
- Build-in short, overload, overheat **Protection**
- 100% burn-in test
- **Apply for LED Light**
- 1 years Warranty
- Output modify range: 3V~100VDC

#### **OUTPUT**

Hold-up time Short protection Overload protection Over temp. protection

60mS Autorecovery Overpower protection Autorecovery 5

## **Detail specifications**

#### 30 Watts (Constant Voltage)

MODEL	O/P Voltage	Load(Current) <sub>1</sub>			Ripple	Current	Efficiency
		Min.	Rated	Max.	Noise 2	Error 3	4
XM-V12030-E	V1: +12V	0A	2.5A	2.5A	150mVp-p	±4%	80% Min.
XM-V24030-E	V1: +24V	0A	1.25A	1.25A	150mVp-p	±2%	81% Min.

## **CE Standards**

EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3 LVD: EN 61347-1, EN 61347-2-13

## Safety Standards

 $\epsilon$ Marking **IP67** Meet

# **Environments**

**Operating Temperature Operating Humidity Storage Temperature** 

-30 ~ 50°C. Ambient 20 ~ 95% RH, No Condensing -40 ~ 80°C. Ambient

Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.

#### NOTE:


- 1. Each output can provide up to maximum load, but total load can not exceed rated output power.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 10uf parallel capacitor.
- 3. The current error is include Load regulation and circuit regulation are measured on the rated load at 220VAC input. (Line regulation is measured from low line to high line at rated load.)
- Efficiency is measured at rated load and 220VAC input.
- 5. The degree of power transistor over 110°C will auto protect and reset
- Reign Power reserve the right to change specifications at any time without notice.

WEB: http://www.switching-powers.com Tel: 886-2-22997550

E-mail: rp21003f@ms7.hinet.net Fax: 886-2-22997596



## **Mechanical Details**

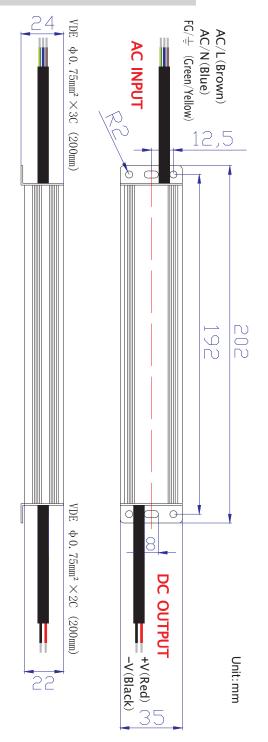

# **Panel Designation**

Symbol	Description				
L	Line Terminal Of AC Input (No Polarity At DC Input)				
N	Neutral Terminal Of AC Input (No Polarity At DC Input)				
<b>(4)</b>	Grounding (Earth)				
+	DC Positive Output Terminal				
-	DC Negative Output Terminal				

**UNIT**: mm

**DIMENSION: 202(L)\*35(W)\*24(H)** 

**MATERIAL: ALUMINUM** 

**COLOR: GRAY** 

WEB: http://www.switching-powers.com Tel: 886-2-22997550

E-mail: rp21003f@ms7.hinet.net Fax: 886-2-22997596

