





CE IP67

General specifications

INPUT

Input range 170~250VAC

Input frequency 50~60Hz Inrush current (25° C) 40A/220VAC

DIMENSIONS: 163(L) x 46(W) x 25(H)mm WEIGHTS: 310g

- Waterproof, meet class IP67
- Convection cooled
- Build-in short, overload, overheat Protection
- 100% burn-in test
- Apply for LED Light
- 1 years Warranty
- Output modify range: 3V~100VDC

OUTPUT

Hold-up time
Short protection
Overload protection
Over temp. protection

60mS Autorecovery Overpower protection Autorecovery⁵

Detail specifications

60 Watts (Constant Voltage)

	MODEL	O/P Voltage	Load(Current) ₁			Ripple	Current	Efficiency
			Min.	Rated	Max.	Noise 2	Error 3	4
	XM-V12060-E	V1: +12V	0A	5A	5A	300mVp-p	±4%	82% Min.
	XM-V24060-E	V1: +24V	0A	2.5A	2.5A	300mVp-p	±2%	83% Min.

CE Standards

EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3 LVD: EN 61347-1, EN 61347-2-13

Safety Standards

CE Marking

IP67 Meet

Environments

Operating Temperature Operating Humidity Storage Temperature -30 ~ 50°C, Ambient 20 ~ 95% RH, No Condensing -40 ~ 80°C. Ambient

Suitable for indoor use or outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.

NOTE:


- 1. Each output can provide up to maximum load, but total load can not exceed rated output power.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 10uf parallel capacitor.
- 3. The current error is include Load regulation and circuit regulation are measured on the rated load at 220VAC input. (Line regulation is measured from low line to high line at rated load.)
- 4. Efficiency is measured at rated load and 220VAC input.
- 5. The degree of power transistor over 110°C will auto protect and reset
- 6. Reign Power reserve the right to change specifications at any time without notice.

WEB: http://www.switching-powers.com Tel: 886-2-22997550

E-mail: rp21003f@ms7.hinet.net Fax: 886-2-22997596



Mechanical Details

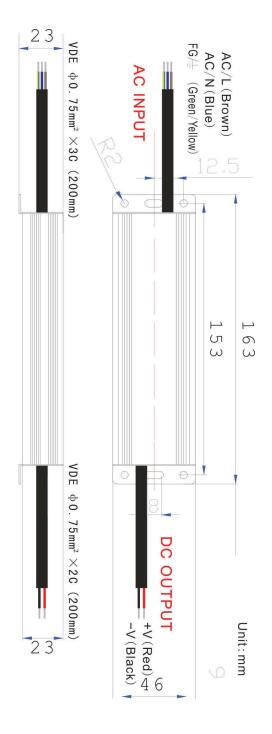

Panel Designation

Symbol	Description				
L	Line Terminal Of AC Input (No Polarity At DC Input)				
N	Neutral Terminal Of AC Input (No Polarity At DC Input)				
(Grounding (Earth)				
+	DC Positive Output Terminal				
-	DC Negative Output Terminal				

UNIT: mm

DIMENSION: 163(L)*46(W)*25(H)

MATERIAL: ALUMINUM

COLOR: GRAY

WEB: http://www.switching-powers.com Tel: 886-2-22997550

E-mail: rp21003f@ms7.hinet.net Fax: 886-2-22997596

